


David B. Hoisington

BAND WIDTH OF A KNIFE-EDGE
SCATTER CIRCUIT.

TA7
.U6
no.50

UNITED STATES NAVAL POSTGRADUATE SCHOOL



BAND WIDTH OF A KNIFE-EDGE

SCATTER CIRCUIT

by

David B. Hoisington

RESEARCH PAPER NO. 50

JANUARY 1965

Library
U. S. Naval Postgraduate School
Monterey, California

BAND WIDTH OF A KNIFE-EDGE
SCATTER CIRCUIT

David B. Hoisington

**BAND WIDTH OF A KNIFE-EDGE
SCATTER CIRCUIT**

Research Report

Submitted by

David B. Hoisington, Professor of Electrical Engineering

**U.S. NAVAL POSTGRADUATE SCHOOL
Monterey, California
January 1965**

ACKNOWLEDGMENT

This work was originally performed by the author for the International Business Machines Corporation in connection with their investigation of high speed data transmission over a microwave knife-edge scatter transmission path from Monterey to San Jose, California. Permission to publish this material as a United States Naval Postgraduate School Research Paper is gratefully acknowledged.

ABSTRACT

The band width of a knife-edge scatter circuit is estimated as a function of the antenna beam width. The knife edge is assumed to be located off to one side of a line between the transmitter and receiver as in the Monterey- San Jose circuit, but is assumed to be in a plane with this line.

It is shown that where the effective knife edge is small compared to the beam width, the signal may be completely cancelled at the receiver. This cancellation can best be avoided by moving one antenna a lateral distance that is calculated.

On the basis of the equations developed in this report the band width between nulls of the Monterey- San Jose microwave circuit was calculated to be 2.6 Mc. The measured bandwidth was 3.4 Mc.

TABLE OF CONTENTS

Chapter		Page
I	DOG LEG KNIFE EDGE SCATTER CIRCUIT	1
II	SHORT KNIFE EDGE	5
	BIBLIOGRAPHY	7
	DISTRIBUTION LIST	8

LIST OF ILLUSTRATIONS

Figure		Page
1	Path geometry	2
2	Signal strength vs frequency	2

LIST OF ILLUSTRATIONS

Page	Figure
1	1. Total Geometry
2	2. Signal strength vs frequency

DOG LEG KNIFE EDGE SCATTER CIRCUIT

Figure 1 shows the geometry involved in a dog-leg knife edge scatter circuit. The reflecting knife edge, AB, is assumed to be uniformly illuminated, and may be taken approximately to be the length illuminated by the narrower of the two beams (narrower at the knife edge) between its half-power points. The difference between the lengths of the longest and shortest signal paths is seen from the figure to be

$$s_1 \theta_1 (\sin \beta_2 / \cos \beta_1 + \tan \beta_1).$$

The signal in the receiving antenna is the sum of signals received from the various portions of the knife edge and the components are assumed to be of equal strength per unit length of the knife edge, and the phase is assumed to vary uniformly along the knife edge (small beam angle). The received signal strength is therefore proportional to

$$\left| \int_0^{\phi_m} e^{j\phi} d\phi \right|$$

where ϕ_m is the phase difference between the longest and shortest paths.

The received signal strength is therefore proportional to $|\sin \phi_m / 2|$.

Now ϕ_m is proportional to frequency, so the received signal varies as

$|\sin kf|$ as plotted in Figure 2. The circuit bandwidth, Δf , is here taken to be the separation between nulls in Figure 2. The actual bandwidth will be somewhat less than this depending on signal-to-noise ratio and the type of modulation used.

For a null frequency f_1 the maximum path difference equals an integral number of wavelengths, or

$$s_1 \theta_1 (\tan \beta_1 + \sin \beta_2 / \cos \beta_1) = n\lambda_1 = nc/f_1$$

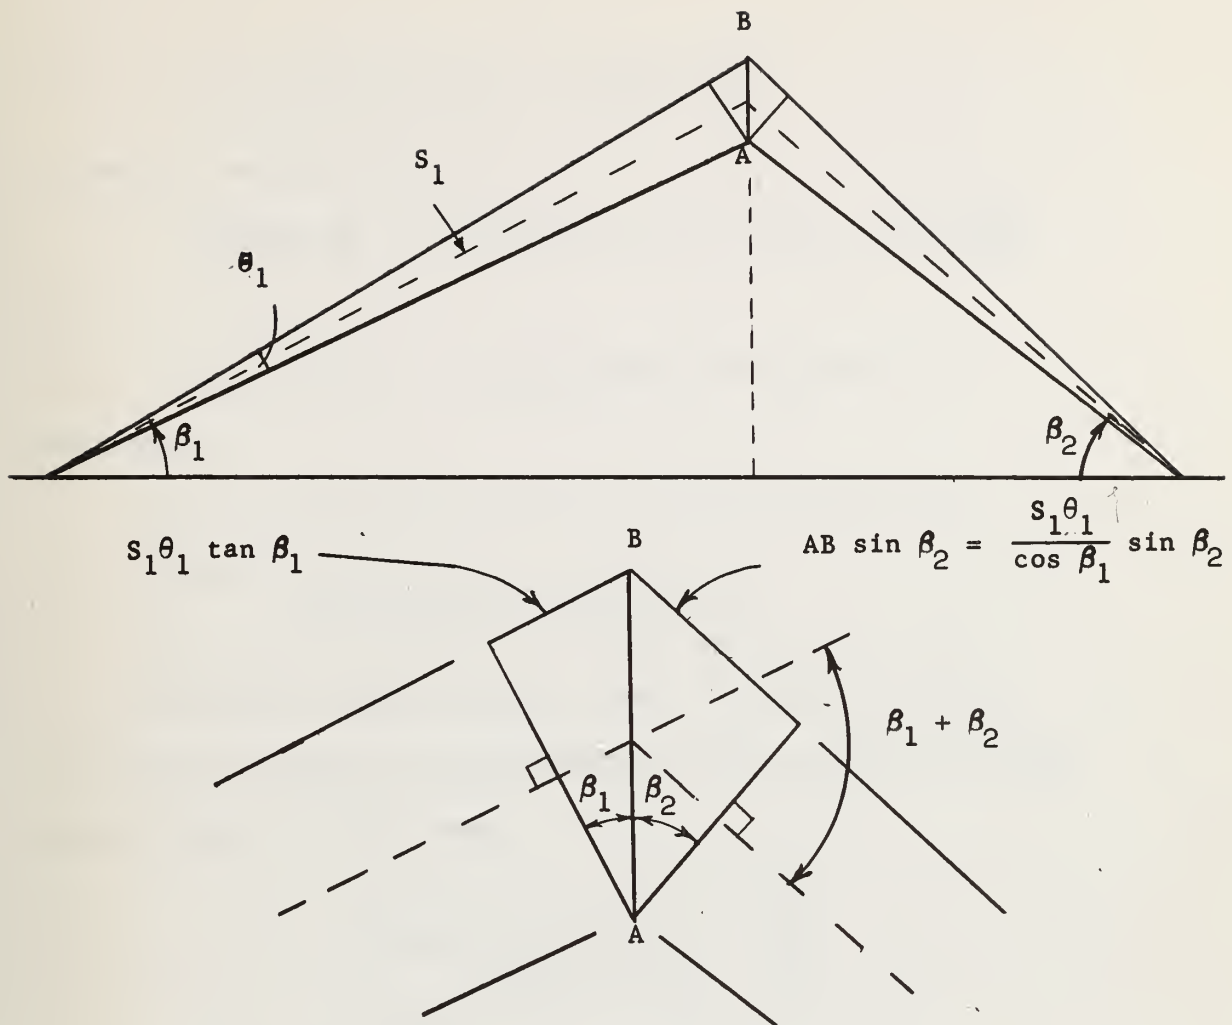


Figure 1. Path Geometry

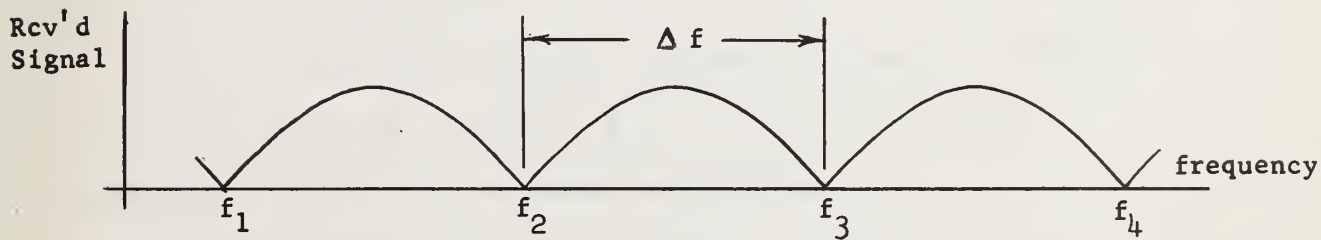


Figure 2. Signal strength vs. frequency

or

$$f_1 = nc/s_1\theta_1(\tan \beta_1 + \sin \beta_2/\cos \beta_1)$$

At the next null, $f_2 = f_1 + \Delta f$

$$s_1\theta_1(\tan \beta_1 + \sin \beta_2/\cos \beta_1) = (n+1)\lambda_2 = \frac{(n+1)c}{f_1 + \Delta f}$$

or

$$f_1 + \Delta f = (n+1)c/s_1\theta_1(\tan \beta_1 + \sin \beta_2/\cos \beta_1)$$

subtracting,

$$\Delta f = \frac{c}{s_1\theta_1(\tan \beta_1 + \sin \beta_2/\cos \beta_1)}$$

It has been assumed that θ_1 is small so that $\theta_1 \approx \sin \theta_1$.

If, moreover, both β_1 and β_2 are small, $\tan \beta_1 \approx \beta_1$, $\sin \beta_2 \approx \beta_2$, and $\cos \beta_1 \approx 1$. In this case

$$\Delta f \approx \frac{c}{s_1\theta_1(\beta_1 + \beta_2)}$$

It is seen in this case that the bandwidth depends only on the angle between the lines of sight, $(\beta_1 + \beta_2)$, the beam width of the narrower beam, θ_1 , and the distance s_1 , and is independent of carrier frequency in any case.

Now calculate the beam width of the Monterey- San Jose circuit from the above equation. Use $\beta_1 + \beta_2 = 6.7^\circ$ $s_1 = 10.0$ miles = 16,090 meters; $\theta_1 = 3.5^\circ$. We obtain $\Delta f = .2.6$ Mc.

It would be useful to test the validity of the above theory. One method would be to use very wide-band modulation at the transmitter with a wide-dispersion spectrum analyzer at the receiver.

Another obvious method would be to vary the frequency of the transmitter at a relatively slow rate. It is to be expected that the characteristics of the received signal will differ from the calculations primarily because of the diffuse knife edge on the actual path, but that there may be appreciable correlation. The positions of the nulls can be expected to vary with propagation conditions, antenna orientation, and antenna location. Both space and frequency diversity should be useful in overcoming the effects of shifting nulls. It may be found that with space diversity antenna #2 should be oriented for maximum signal during a fade of this type at antenna #1, particularly if the spacing between antennas is relatively small. In cases where a channel width is available that is much greater than the information bandwidth, frequency diversity could be obtained in a single transmitter through the proper choice of modulation techniques such as by the use of one or more subcarriers in addition to the main carrier.

Note that the null frequencies can be changed by changing the orientation of that antenna located closer to the knife edge. The apparent direction of arrival of a signal of given frequency may therefore be different at different locations-- even for two receiving antennas located quite close together as at San Jose. If the frequency is changed, the apparent direction of arrival of the signal can be expected to change.

SHORT KNIFE EDGE

A special case of interest occurs on a path where the knife edge visible from both transmitter and receiver subtends an angle less than the beam width of the antenna closer to it, or narrower than the beam width of either antenna. For purposes of discussion we will assume that the knife edge fills only a fraction of the width of the beam of the receiving antenna. For a fixed receiving antenna location it is quite possible that the frequency used will be at one of the nulls shown in Figure 2. The null could be avoided by (a) changing the transmitter frequency, (b) by rotating the receiver antenna in order to illuminate the knife edge nonuniformly in the side of the beam, or (c) by moving the receiving antenna. The frequency cannot always be changed, and illuminating the knife edge in the side of the beam is inefficient, so it is desirable to know how far the antenna might have to be moved laterally to go from a null to a position of maximum signal strength. If this distance is small, provision might be included in the antenna mount for lateral movement.

Referring to Figure 1, we shall have a maximum received signal strength if the maximum path difference equals an odd number of half wavelengths, or

$$AB(\sin \beta_2 + \sin \beta_1) = (n + 1/2) \lambda$$

or

$$AB(\beta_1 + \beta_2) \approx (n + 1/2) \lambda \quad (\beta_1 \ll 1; \beta_2 \ll 1)$$

The adjacent maximum occurs where

$$AB(\beta_1 + \beta_2 + \Delta \beta_1) = (n + 3/2) \lambda$$

Therefore

$$AB \Delta \beta_1 = \lambda$$

The lateral distance between adjacent points of maximum signal strength is $s_1 \Delta \beta_1$, or

$$s_1 \Delta \beta_1 = \frac{s_1 \lambda}{AB}$$

For example, if $\lambda = 0.15$ meters, $s_1 = 19,200$ meters, and $AB = 600$ meters, the adjacent maxima are separated by 5.1 meters, and a lateral motion of this amount would be required to ensure that the antenna could be located at a point of maximum signal strength.

BIBLIOGRAPHY

1. F. H. Dickson, J. J. Egli, J. W. Herbstreit, G. S. Wickizer. Large Reduction of VHF Transmission Loss and Fading by the Presence of a Mountain Obstacle in Beyond-Line-of-Sight Paths. Proceedings of the IRE, pp 967-969, August 1953.
2. R. S. Kirby, H. T. Dougherty, P. L. McQuate. Obstacle Gain Measurements over Pikes Peak at 60 to 1046 Mc. Proceedings of the IRE, pp 1467-1472, October 1955.
3. G. W. Swenson, Jr. VHF Diffraction by Mountains of the Alaska Range. Proceedings of the IRE, pp 1049-1050, August 1956.
4. J. H. Crysdale, J. W. B. Day, W. S. Cook, M. E. Psutka, P. E. Robillard. An Experimental Investigation of the Diffraction of Electromagnetic Waves by a Dominating Ridge. Transactions IRE, PGAP, pp 203-210, April 1957.

DISTRIBUTION LIST

Documents Department
General Library
University of California
Berkeley 4, California

Librarian
Lockheed Aircraft Corp.
California Division
Dept. 72-25, Bldg. 63-1, Plant A-1
Burbank, California

Naval Ordnance Test Station
China Lake California
Attn: Technical Library

Douglas Aircraft Company, Inc.
Engineering Library
El Segundo Division
827 Lapham Street
El Segundo, California

Library
Scripps Institution of Oceanography
University of California
La Jolla, California

Librarian
Government Publications Room
University of California
Los Angeles 24, California

Librarian
Numerical Analysis Research
University of California
405 Hilgard Avenue
Los Angeles 24, California

Librarian
California Institute of Technology
Pasadena, California

Mrs. Hilda R. Elledge, Librarian
Office of Naval Research Branch Office
1030 East Green Street
Pasadena 1, California

CONVAIR (San Diego)
Div. of General Dynamics Corp.
San Diego 12, California
Attn: Engineering Library

Librarian
Ryan Aeronautical Corp.
Lindbergh Field
San Diego, California

Commanding Officer and Director
U. S. Navy Electronic Lab. (Library)
San Diego 52, California

Mr. Klaus G. Liebhold, Librarian
TEMPO, General Electric Co.
725 State Street
Santa Barbara, California

Document Library
Stanford University
Stanford, California

Government Document Division
University of Colorado Libraries
Boulder, Colorado

Librarian
Hamilton Standard Propellers
East Hartford, Connecticut

The Library
United Aircraft Corporation
400 Main Street
East Hartford 8, Connecticut

Documents Division
Yale University Library
New Haven, Connecticut

Librarian
University of Chicago
Chicago, Illinois

Librarian
Bureau of Naval Weapons
Department of the Navy
Washington, D. C. 20360

Documents Department
Northwestern University Library
Evanston, Illinois

Librarian
Catholic University of America Library
Washington 17, D. C.

The Technological Institute, Library
Northwestern University
Evanston, Illinois

Librarian
George Washington University
Washington 6, D. C.

Librarian
Purdue University
Lafayette, Indiana

Librarian
National Aeronautics and Space Agency
1512 H Street, N. W.
Washington, D. C.

Collins Radio Company
Cedar Rapids, Iowa
Attn: E. E. Ellison, Librarian

National Bureau of Standards Library
Room 301, Northwest Building
Washington 25, D. C.

Librarian
Glenn L. Martin Company
Baltimore, Maryland

The Director
Naval Research Laboratory
Washington 25, D. C.
Attn: Code 2021

Librarian
Johns Hopkins University
Baltimore, Maryland

Librarian
U. S. Navy Intelligence School
U. S. Naval Receiving Station
Washington 25, D. C.

Documents Office
University of Maryland Library
College Park, Maryland

Librarian
Illinois Institute of Technology
Chicago 16, Illinois

Librarian
Applied Physics Laboratory
Johns Hopkins University
Silver Spring, Maryland

Commander, U. S. Naval Ordnance Lab.
White Oak, Silver Spring
Maryland
Attn: Library

Librarian
Technical Library, Code 263a
Building 39/3
Boston Naval Shipyard
Boston 29, Massachusetts

Technical Report Collection
303A, Pierce Hall
Harvard University
Cambridge 38, Massachusetts
Attn: Mrs. M. L. Cox, Librarian

Massachusetts Institute of Technology
Serials and Documents
Hayden Library
Cambridge 39, Massachusetts

Librarian
Lowell Technological Institute
Lowell, Massachusetts

Librarian
University of Michigan
Ann Arbor, Michigan

Librarian
University of Minnesota
Minneapolis 14, Minnesota

Engineering Library
Washington University
St. Louis 5, Missouri

Librarian
Forrestal Research Center
Princeton University
Princeton, New Jersey

Librarian
Fordham University
Bronx 58, New York

Librarian
Cornell Aeronautical Laboratory
4455 Genesee Street
Buffalo 21, New York

Library
Documents Section
Cornell University
Ithaca, New York

Librarian
Grumman Aircraft Engineering Corp.
Bethpage
Long Island, New York

Mr. Edward Muhs, Library Supervisor
Airborne Instruments Laboratory, Inc.
Walt Whitman Road
Melville, Long Island, New York

Central Order Records
Technical Information Library
Bell Telephone Laboratories
463 West Street
New York 17, New York

Columbia University Libraries
Documents Division
535 West 114th Street
New York 27, New York

Librarian
New York Naval Shipyard
Material Testing Laboratory
New York, New York

Scientific Liaison Officer
Office of Naval Research
Branch Office, London
Navy 100, Box 39
c/o Fleet Post Office
New York, New York (25 copies)

Engineering Societies Library
United Engineering Trustees, Inc.
29 West 39th Street
New York 18, New York

Librarian
Special Devices Center
Port Washington, New York

Librarian
Rensselaer Polytechnic Institute
Troy, New York

Librarian
Documents Division
Duke University
Durham, North Carolina

Gift and Exchange Division
Main Library
Ohio State University
Columbus 10, Ohio

Librarian
University of Oklahoma
Norman, Oklahoma

Librarian
Westinghouse Electric Corporation
Essington, Pennsylvania

Commander
Philadelphia Naval Shipyard
Philadelphia 12, Pennsylvania
Attn: Librarian, Code 263

Librarian
University of Pennsylvania
Philadelphia, Pennsylvania

Librarian
Carnegie Institute of Technology
Pittsburgh, Pennsylvania

Librarian
Brown University
Providence, Rhode Island

Central Research Library
Oak Ridge National Laboratory
Post Office Box P
Oak Ridge, Tennessee

Order Librarian
Library
A & M College of Texas
College Station, Texas

Librarian
Chance Vought Aircraft, Inc.
P. O. Box 5907
Dallas, Texas

Armed Services Technical
Information Agency
Arlington Hall Station
Arlington 12, Virginia (10 copies)

FOREIGN COUNTRIES

Mr. F. W. Gravell, Librarian
The Patent Office Library
25, Southampton Buildings
London, W. C. 2, England

Mr. H. T. Pledge, Keeper of the Library
The Science Library
Science Museum
South Kensington
London, S. W. 7, England

Librarian
National Inst. of Oceanography
Wormley, Godalming
Surrey, England

Accession Department
National Lending Library
for Science and Technology
Boston Spa
Yorkshire, England

Dr. E. Hemlin, Director
Library
Chalmers Univ. of Tech.
Storgatan 43
Gothenburg C, Sweden

Authors (20 copies)



TA7
.U6
no.50

Hoisington

80024

Band width of a knife-
edge scatter circuit.

TA7
.U6
no.50


Hoisington

80024

Band width of a knife-
edge scatter circuit.

genTA 7.U6 no.50

Band width of a knife-edge scatter circu



3 2768 001 61491 0

DUDLEY KNOX LIBRARY